



FOCUS BOLT 500RX QUICKSTART GUIDE

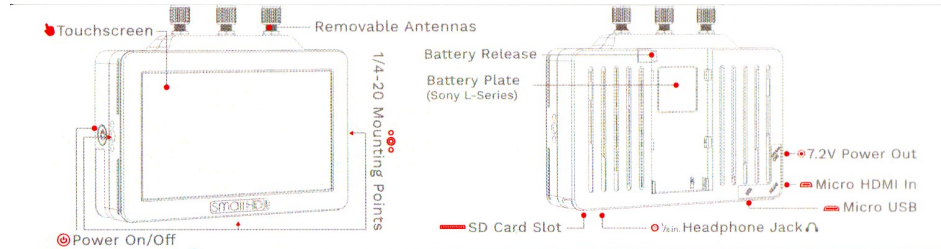


- POWER ON/OFF**
 Hold to power on/off.
 - TOUCHSCREEN**
 Swipe and tap the screen to navigate.
 - 1/8 in. HEADPHONE JACK**
 Listen to audio through your monitor.
 - 7.2V POWER OUT**
 Use your FOCUS monitor to power select cameras with the corresponding SmallHD camera power adapter.
 - 1/4-20 MOUNTING POINTS**
 3x 1/4 20 mounting threads (Left, right, & bottom.)
 - SD CARD SLOT**
 Load 3D LUTs, firmware updates, and save screen captures.
 - MICRO HDMI INPUT**
 Connect to your camera to display SDI signal.
 - MICRO USB**
 Secure Micro USB input.
- MONITOR START UP**
 After you connect to a power source, follow the on-screen instructions to complete the startup process.
- ACTIVATE YOUR MONITOR**
 After you set the date and time, follow the on-screen instructions to enter your 12-digit ID into your browser. Once entered, you will receive a 5-digit activation code.
- STAY UP TO DATE**
 To access the most recent firmware visit: smallhd.com/LatestFirmware

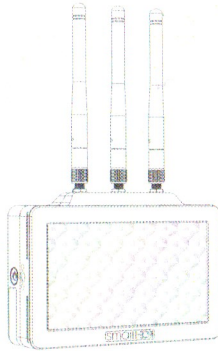

PAGEBUILDER OS

All SmallHD on-camera monitors are equipped with the powerful and easy-to-use PageBuilder operating system. Listed below are instructions on how to get familiar with this system. A Page is a way to organize and access all of your image analysis tools. You can have up to eight different Pages, not including the monitor settings Page.

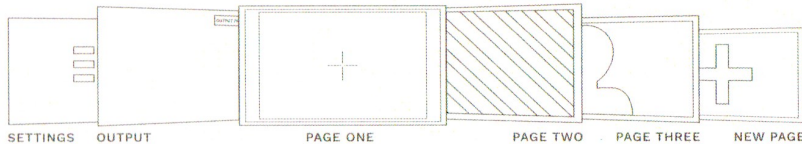

MONITOR SETTINGS

SWIPE RIGHT ► to reveal the Monitor Settings menu.
 SWIPE UP ▲ or DOWN ▼ to view more menu options.
 TAP to select a menu Setting.
 TAP/Slide to make adjustments.
 SWIPE LEFT ◀ to exit the Monitor Settings menu.

CHANGE PAGES

Navigate through the Pages by SWIPING LEFT ◀ or RIGHT ►

PAGES VIEW

SWIPE DOWN ▼ to reveal Pages View.
 SWIPE LEFT ◀ or RIGHT ► to cycle through Pages.
 Delete a Page by TAPPING the [X] icon.

ADD A PAGE

From Pages View, SWIPE LEFT ◀ and TAP the + to create a new Page.

ADD A NEW TOOL

Tap screen to bring up the New Tool Bar.
 View Tool Categories by TAPPING the Add New Tool Tab.
 TAP the Tool Category icon to navigate to the Tool of your choice.
 TAP the Tool Name to assign it to the Page. +
 PRESS and HOLD Tool Name to add to all Pages. +
 TAP the Tool icon to toggle the Tool on and off.
 TAP the screen to close the Tool Bar.

TOOL CUSTOMIZATION

Once a Tool is assigned to a Page you can TAP or SWIPE the Tools Tab to reveal the Tools customizations.

PAIRING INSTRUCTIONS FOR YOUR FOCUS BOLT 500 RX

- Using the FOCUS BOLT RX, swipe right until the Settings Menu appears.
- Select the Wireless option.
- Activate pairing mode on your FOCUS BOLT RX receiver.
- Activate pairing mode on your transmitter.
- Once the transmitter is located, confirm pairing on the monitor.
- Once "Paired", green check marks will appear on the screen.
- Exit the menu to operate the monitor.
- To unpair, select Wireless in the Settings Menu; select "Unpair?"



BEST PRACTICES

- + Keep the transmitter and receiver at close range for the first 60 seconds to allow scanning for best wireless channel.
- + When using multiple Bolt systems, place the transmitter and receiver 6 or more ft. apart from each other.
- + Make sure your Teradek transmitter firmware is up to date by visiting: teradek.com/pages/downloads#bolt
- + Pairing video and other FOCUS Bolt tutorials visit: www.smallhd.com/videos
- + For additional support please contact: www.smallhd.com/support

*Pairs with the FOCUS Bolt 500 TX and Teradek 500 transmitters.
 To see compatibility chart visit: www.smallhd.com/wireless*

FOR A DETAILED GUIDE VISIT US AT: WWW.SMALLHD.COM/USER-GUIDE

FOLLOW US ON SOCIAL MEDIA @SMALLHD



THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.

